


30W SOLAR CCTV LIGHT



Features

Solar Lighting Designs CCTV/Lighting all-in-one units offer remote lighting and CCTV recording from almost any location. Systems are available in Wi-Fi or 4G models and are standalone solutions for areas without access to mains power. Featuring a 1440P full-colour day and night camera with 350° horizontal rotation and 90° vertical adjustment, the microphone and speaker allow live two-way communication using the EseeCloud application. Video can be viewed remotely or stored locally on an optional microSD card for playback at any time. The 30W Solar CCTV Light is an all-in-one security and lighting solution for a wide range of applications.

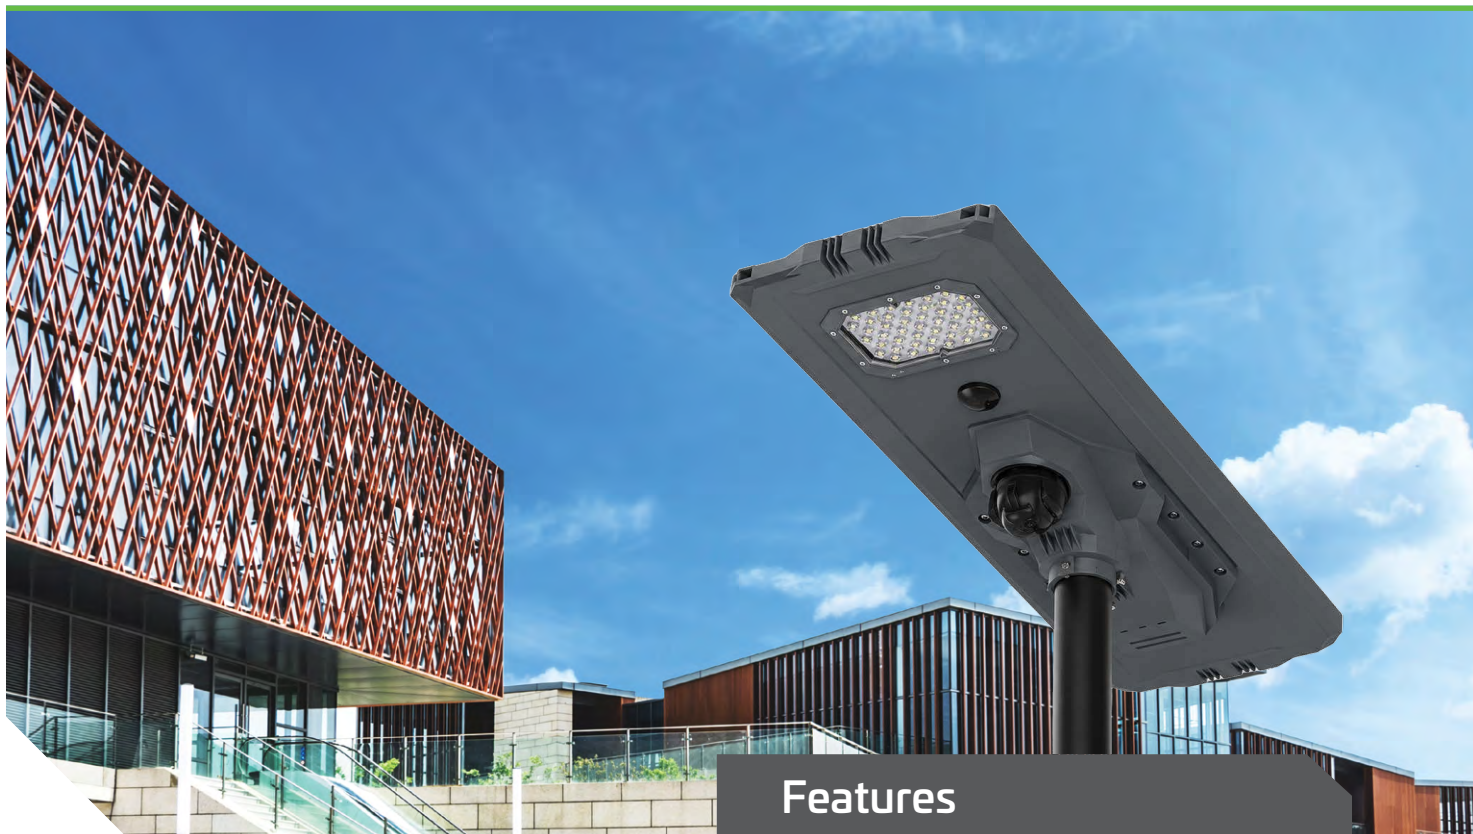

Luminaire Height	6m
Lumen Output	4500lm
LED Output	30W

Automatic dusk to dawn lighting and recording

1440P full-colour day & night camera

Wi-Fi or 4G enabled

Live Stream or Record with Two-Way Audio
(Built-In Microphone & Speaker)

Complete stand alone system

350° pan & 90° tilt camera


Mounting height of 6 metres

IP65 weatherproof construction

The microphone and speaker allow live two-way communication using the EseeCloud application.

2 year warranty for faulty workmanship or component failure not influenced by external means

30W SOLAR CCTV SPECIFICATION

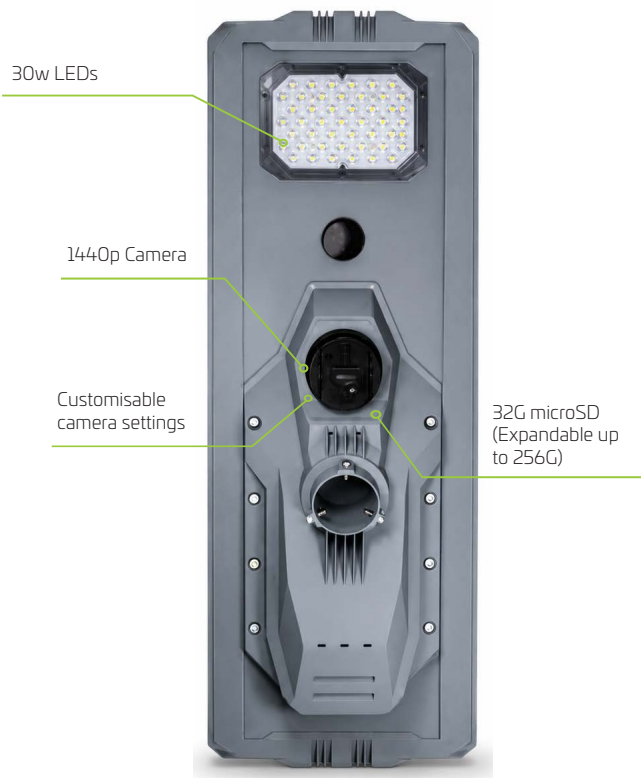

Applications

Car parks | Perimeter lighting | Hospitals | Industrial units


Technical Data

Solar Panel Wattage	60W
LED Output	30W
Lumen Output	4500 lm
Battery Type	LiFePO4
Battery Specifications	75AH 3.2v (240Wh)
Autonomy	> 7 nights
Correlated Colour Temp (CCT)	6000–6500K
Fixture Size	932 (l) x 365 (w) x 160 (h) mm
Camera Resolution	1440P day and night
Recharge	4 – 6 hours
Mounting Height	6 metres
Mounting	76mm column
Finish	Aluminum and powder coat satin white
Warranty Period	2 years
SKU	SOLL030/CCTV

Mode of Operation

1. Automatic dusk to dawn lighting.
2. The P.I.R (passive infrared) sensor is activated by movement. The light will operate at 30% output until the PIR is activated operating at 100% until no movement is detected returning to 30% output.

CCTV records to internal SD card 24/7.

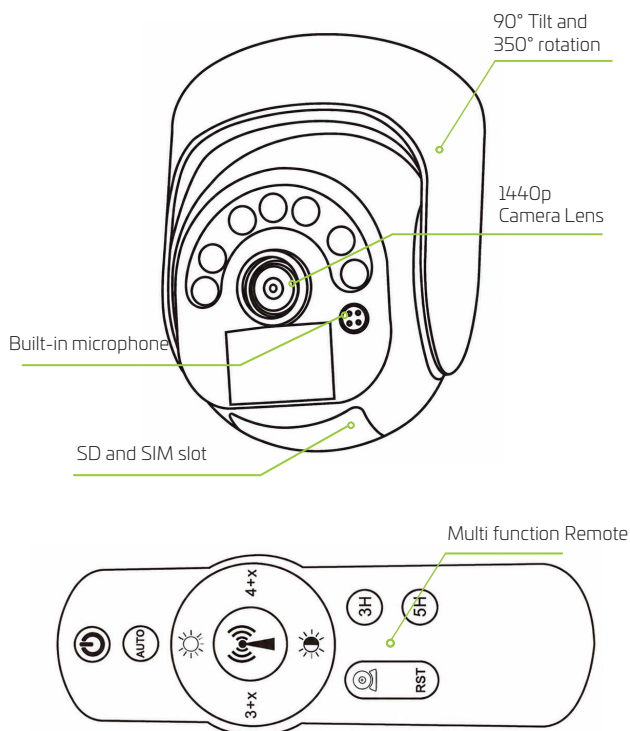

As we continue to improve the products function and/or design specifications and data provided may change without notice. Errors and omissions accepted.